


# FLAP BARRIER



# FLAP BARRIER

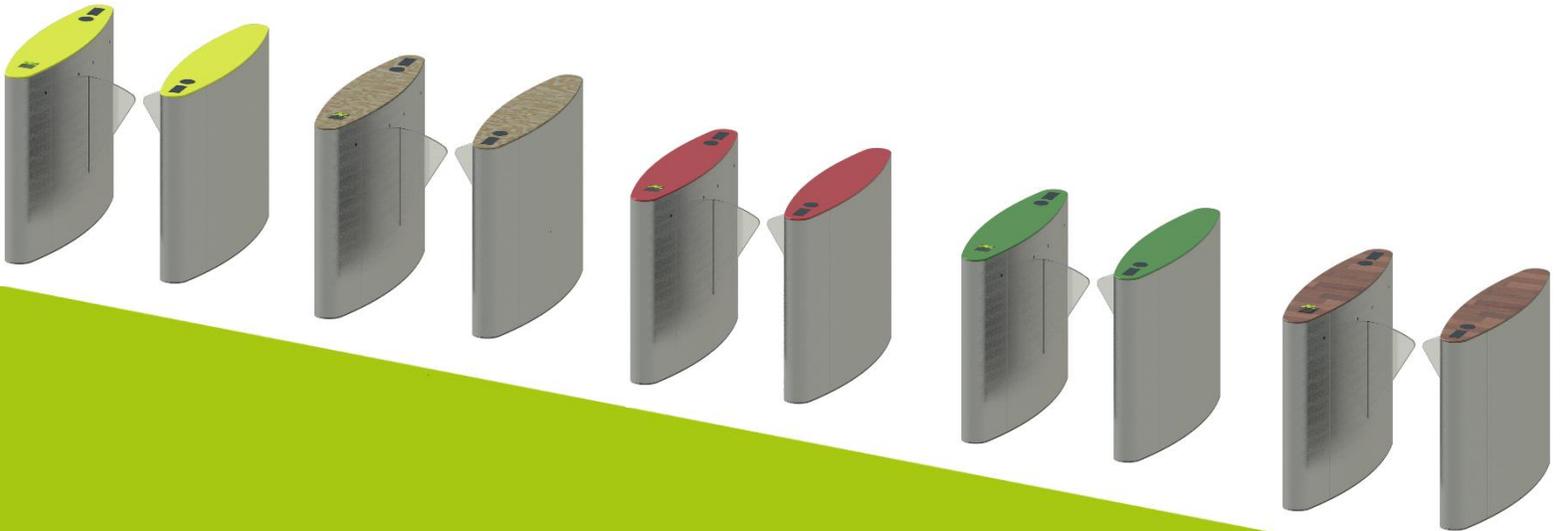

## Technical Specification:

- Top Lead : Black Glass / Acrylic / As per Interior \*
- Feature : Inbuilt Tailgating feature and Wrong Entry detection
- Supply Voltage : 230VAC  $\pm 10\%$
- Power Consumption : 15-80 Watt
- Drive Technology\* : BLDC / Stepper Motor Drive
- Communication Protocol\* : USB or RS485 or RS232
- Access Time Out : 0 - 15 sec (Adjustable)
- Opening / Closing Speed : < 800 mSec
- Duty Cycle : Intensive use
- Cabinet Material : Available in Stainless Steel Grade 304/316 Or Mild Steel
- Flap Arm material\* : Toughen Glass or Polycarbonate
- Cabinet Dimension : L 1250mm \* W 300mm \* H 1000mm  $\pm 5\%$
- Passage Width : 550mm
- Lane Indicator : Built-in (Green or Red)
- Throughput : 35-40 persons/minute
- M.C.B.F. : 10 million cycles
- Operating Temperature : -10 to 55° C
- Installation : By anchor bolts on plain surface
- Optional Accessories : Crawling Sensor, Jumping sensor, Flap Arm with RGB LED, Digital IN-OUT Counter, Wireless Remote, S.S. Railings, Canopy etc.





# FLAP BARRIER




## General Arrangement Drawing:

### TOP VIEW

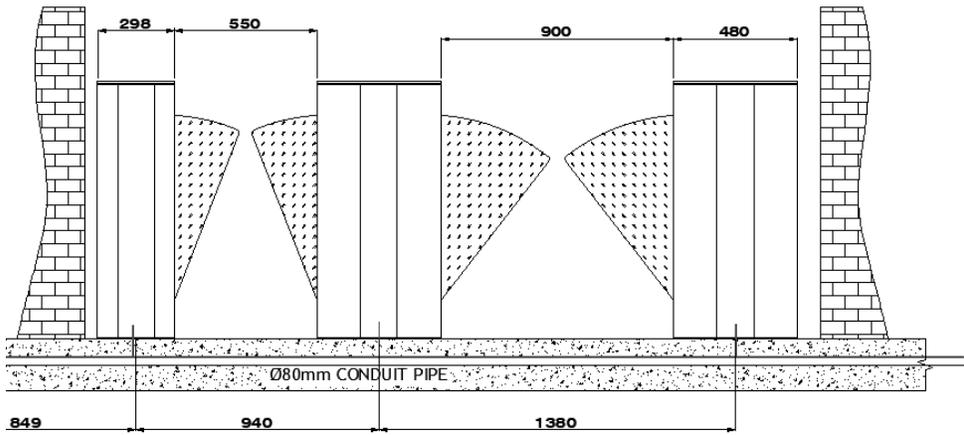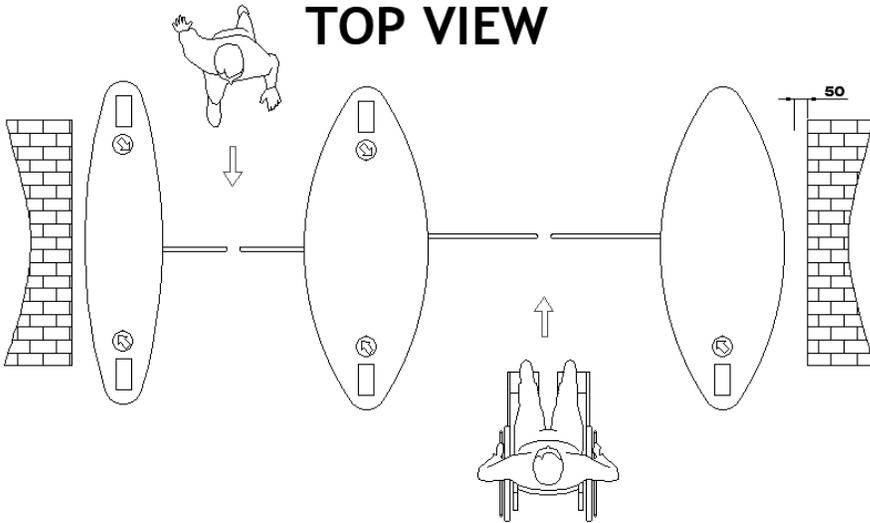

### FRONT VIEW

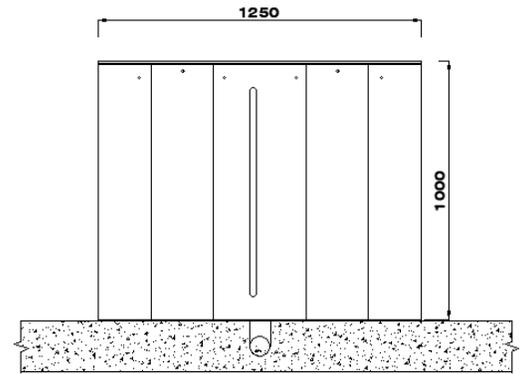

### SIDE VIEW

