


SWING GATE



Leading Indian Manufacturer of all types of Pedestrian Access Control System's

SWING GATE

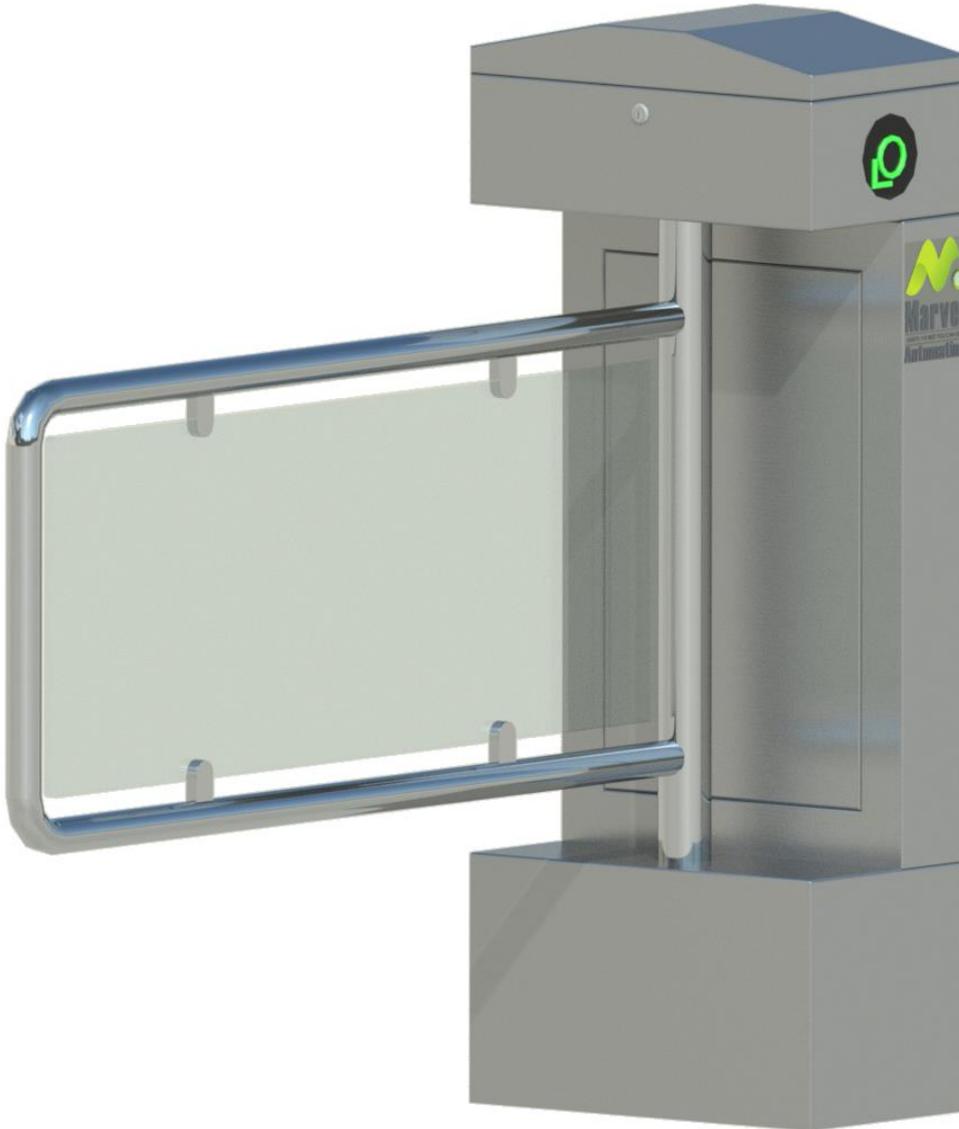

Technical Specification:

- Supply Voltage : 230VAC \pm 10%
- Power Consumption : 15-40 Watt
- Drive Technology : BLDC / Stepper Motor Drive
- Communication Protocol* : USB or RS485 or RS232
- Integration : 4 Inputs, 4 PFC outputs & Optional RS485
- Access Time Out : 0 - 15 sec (Adjustable)
- Opening / Closing Speed : 2 Sec
- Duty Cycle : Intensive use
- Cabinet Material : Available in Stainless Steel Grade 304/316 Or Mild Steel
- Arm material : Stainless Steel Grade 304
- Cabinet Dimension : L 400mm * W 230mm * H 1000mm \pm 5%
- Passage Width : 950mm
- Lane Indicator : Built-in (Green or Red)
- Throughput : 15-20 persons/minute
- M.C.B.F. : 10 million cycles
- Operating Temperature : -10 to 55° C
- Installation : By anchor bolts on plain surface
- Included Accessories : Mains Cable, Foundation Bolts etc.
- Optional Accessories : Digital IN-OUT Counter, Wireless Remote, S.S. Railings, Canopy etc.



SWING GATE



General Arrangement Drawing:

